




IQSpeakerphone S330



Quick Guide



www.IQBoard.net
IQBoard@IQBoard.net

Installation


To ensure normal the use of a speakerphone, please do not install the speakerphone at the following locations:

- Where there is high noise, the speakerphone may pick up the noise, and when you talking, it will prevent the speakerphone to enter the receiving mode.
- The surface of the speakerphone will be scratched by vibration.
- Do not place items within 60 cm of the speakerphone.
- Please use the power adapter provided by the product to avoid accidents.


Installation steps

- If you need to talk over a USB cable, connect one end of the USB cable to the USB port of the device and the other end to the USB port of the speakerphone.
- If you need a LINE IN/LINE OUT to call, please connect one end of the 3.5mm analog audio LINE to the LINE IN/LINE out port of the video conferencing terminal and the other end connect to the IN/OUT port of the speakerphone.
- When choosing to install two expansion microphone, use the expansion microphone connector to connect the speakerphone EXT1, EXT2 port.


Packing List




Speakerphone




USB Cable



User manual




4-Strand 3.5MM
Cable



Power adapter

Optional Accessories





4P4C Cable x
3pcs




Expansion microphone
(up to 2pcs)

Product Overview

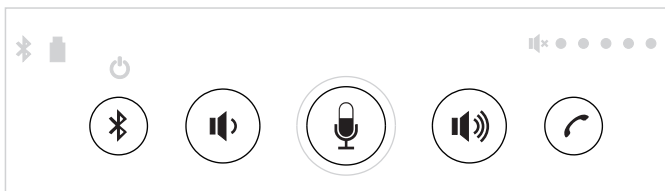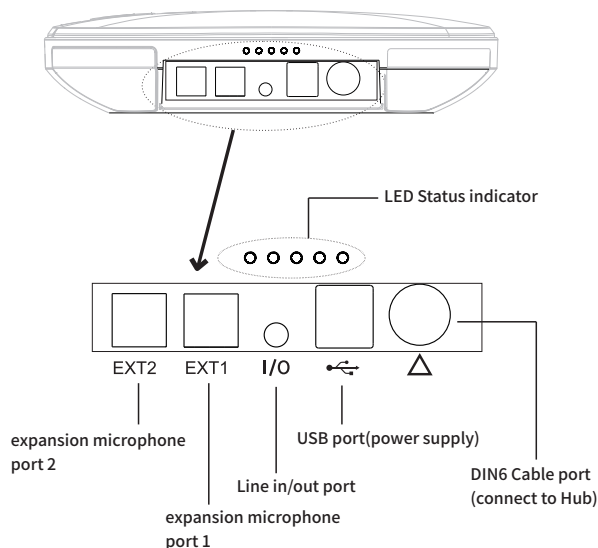

	Volume button	Press the Volume down/up button, The Status LED shows the current volume
	Bluetooth button	Short press to Turn on/off Bluetooth, long press 3 seconds to turn the power on/off
	Answer/End calls	Press the Answer/End calls button
	Mute Microphone	Turn on/off Mute Microphone button
	PC Mode	Press the volume up button and microphone mute button at the same time for 4 seconds to enter PC mode and the working status light will flash green three times
	Mobile Mode	Press the volume down button and microphone mute button at the same time for 4 seconds to enter the mobile mode and the working status light will flash green two times
	Echo cancellation Mode	Press the answer/end calls button and microphone mute button at the same time for 4 seconds to enter/exit echo cancellation mode, enter the echo cancellation mode the blue light of the working status lamp will flash blue three times and exit flashes two times

LED Status Indicator

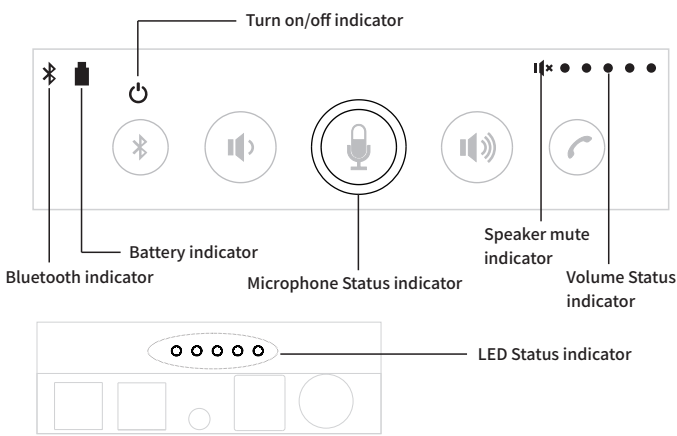

LED Status indicator	Blue light on	USB connection
	Red light on	Microphone mute status
Speaker mute indicator	Red light on	Speaker mute status
Volume Status indicator	Green light on	Current Volume status
Wireless Indicator	Green light off	Wireless disconnection
	Green light always on	Wireless connection
Battery indicator	Red light on	Low battery
	Green light flashing	The battery is charging
	Light off	Full battery
Microphone Status indicator	Red light on	Microphone mute status
	Green light on	Exit Microphone mute status

How to use Speakerphone

Connection Steps for USB

- You can connect the power supply equipment with the original power adapter or connect one end of the USB cable to the USB port of the PC and video conference system, and connect the other end to the speakerphone.
- Turn on the power button after the connection was confirmed correct. And wait for the speakerphone self-check completed.
- It will take a few seconds to install the driver automatically for the first setup. Turn on the terminal. Third-party conference software, and select the microphone and speaker driver to start the audio and video conference with the device.

Battery charging instructions: You can use DIN6 interface or USB interface of the speakerphone to charge. When the DIN6 interface and USB interface are used at the same time, the speakerphone is preferred to use DIN6 interface for charging.

Bluetooth pairing

Once paired with a Bluetooth device, you can use the speakerphone for audio call. To pair your Bluetooth device with the speakerphone, follow steps below:

- Press and hold the “” button until the Bluetooth Indicator flashes green light. The speakerphone is under Bluetooth pairing mode.
- Turn on the Bluetooth function of the mobile phone and click search.
- Search with your Bluetooth device and connect.
- When the Bluetooth was set up, the Bluetooth indicator will keep lighting on. Then you can use the speakerphone for audio call.
- Press the “” button to turn off Bluetooth.

Note: when Bluetooth fails to match, Bluetooth needs to be restarted.

In/Out Connection

Use a 3.5mm 4-strand cable to connect your phone or PC device to the "I/O" port of the speakerphone.

If the device connection port is a 3.5mm 3-strand port, you need a transfer adapter for connecting. Insert audio transfer plug into the "I/O" port of Speakerphone. Connect the microphone port and speaker port of Audio Transfer plug to the IN/OUT port of the PC or video conferencing system with two 3.5mm 3-strand cable.

Note: Please set the phone LINE IN/OUT mode to "PC Mode" when the device is PC or video devices. Or set the phone LINE IN/OUT mode to "Mobile Mode" while connecting a smartphone.

Installation and Use of Optional Expansion Microphone

Use an expansion microphone for important and large meetings.

- Connect one end of a 2.5-meter long 4P4C dedicated wire to the socket of the expansion microphone and the other end to the speakerphone EXT1.
- Connect one end of a 2.5-meter long 4P4C dedicated wire to the socket of the expansion microphone and the other end to the speakerphone EXT2.
- Due to the host uses a high single point microphone. To achieve the best effect, the speaker should be facing the microphone directly in front of the microphone. The direction of the microphone is the same as that of the nameplate.
- The expansion microphone has mute switch and status indicator. The indicator is green when it works normally, and red when mute.

Note: In order to properly use and protect the expansion microphone, it is necessary to unplug and unplug the expansion microphone connection and install the expansion microphone without power.

